



EB-Gasket-VRS-3L

Torque Specification (Nm)

These cylinder head bolts are “torque to yield” and require replacing.


This VRS Gasket set is supplied with the thickest gasket option.

The head gasket is manufacture to an OEM spec. It does not allow excessive over boring. Check there is adequate clearance around each cylinder bore before fitment.


All Bolts:

Stage 1: 78Nm
Stage 2: +90°
Stage 3: +90°

Inlet Manifold: 24Nm
Exhaust Manifold: 52Nm



Torque Sequence

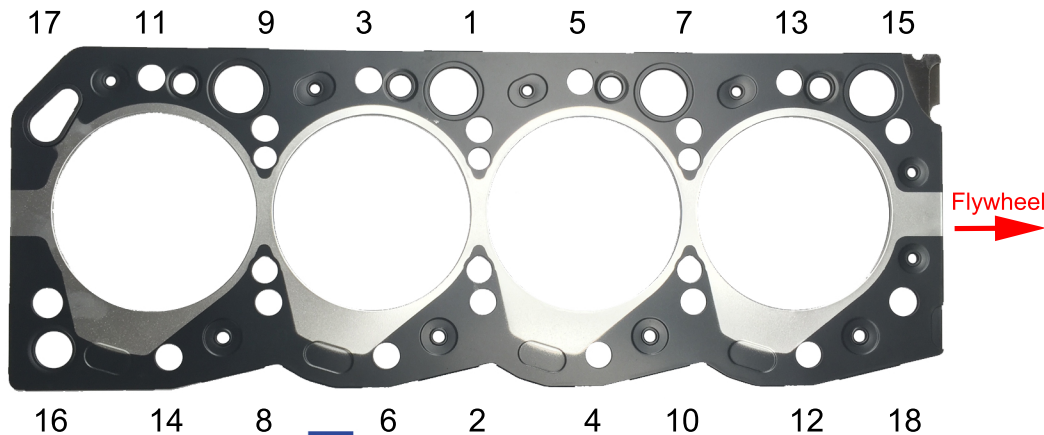

**ENGINE
BITS**

