



EB-Gasket-VRS-4N15

Torque Specification (Nm)

ENGINEBITS


These cylinder head bolts are “torque to yield” and require replacing.

This VRS Gasket set is supplied with the thickest gasket option.


The head gasket is manufacture to an OEM spec. It does not allow excessive over boring. Check there is adequate clearance around each cylinder bore before fitment.

All Bolts:

- Stage 1: 50Nm
- Stage 2: +90°
- Stage 3: +90°
- Stage 4: Loosen all bolts
- Stage 5: 50Nm
- Stage 6: +90°
- Stage 7: +90°
- Stage 8: +90°



Torque Sequence

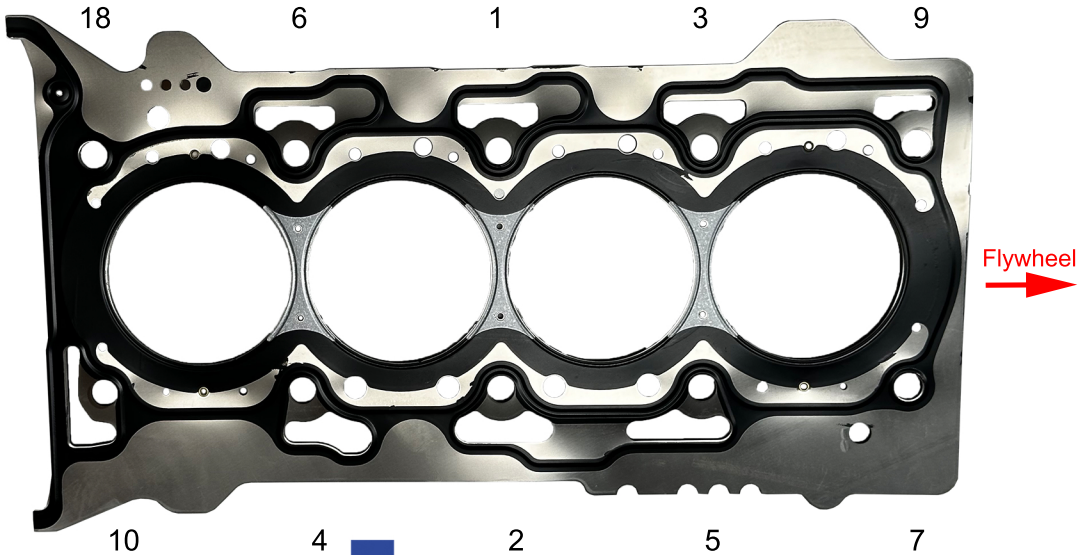

ENGINE
BITS

